
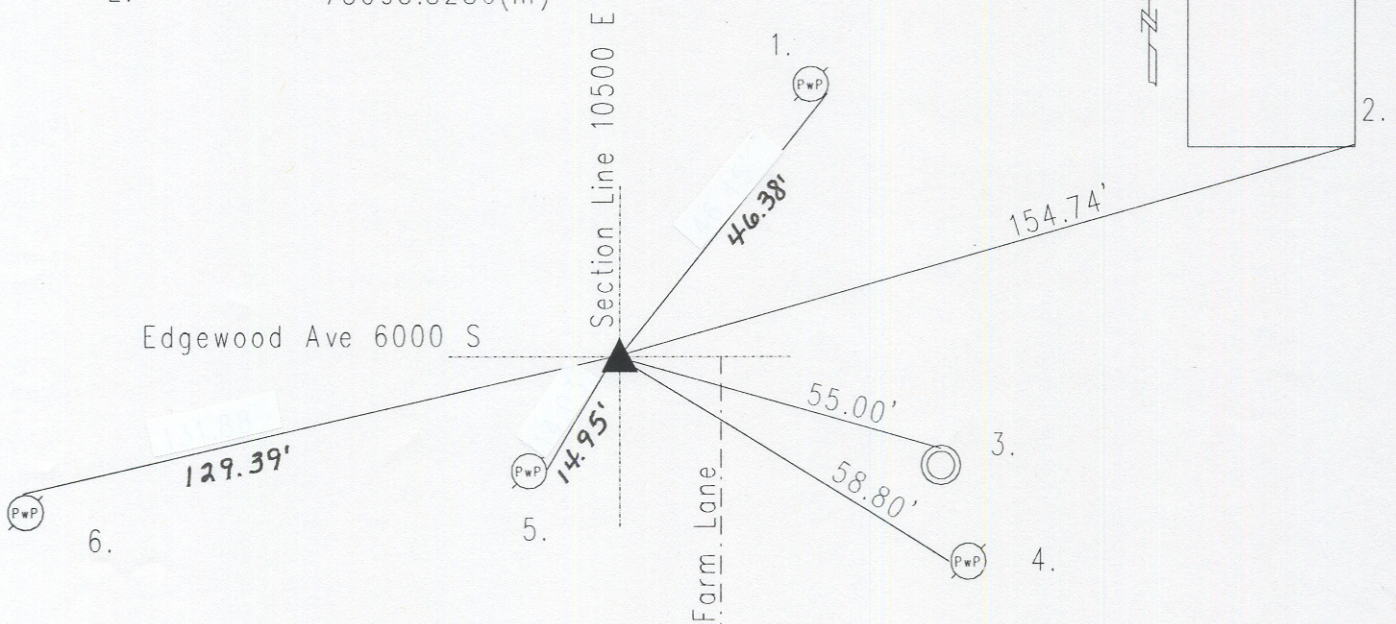


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 9 TOWNSHIP 14 RANGE 5  
DATE: 10-15-02 1-17-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison FD  
METHOD OF ESTABLISHMENT: County 10-26-98  
IN. S.P.C. E ZONE NAD '83  
NAME: 14050902  
N: 492281.5293(m)  
E: 73095.8286(m)

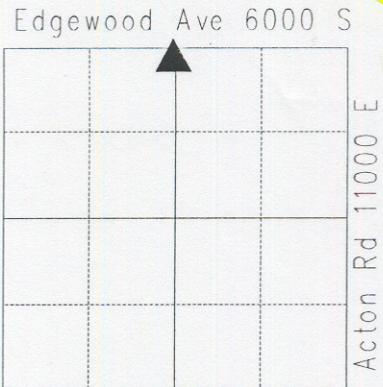

Original post set 1820 by Hendricks with witness: 20" ash S 47 W 17 links; 14" dogwood S 9 E 37 links per Marion County Atlas pg. 13. Hosbrook 3-10-1852 called stone with witness: 28" oak S 21 E 90 links. 5-9-57 Monroe called railroad spike over stone. 5-9-70 Fortner called PK nail over stone. 11-8-74 Keller called railroad spike. 5-26-78 Presutti called railroad spike. 2-7-80 Cleveland called railroad spike. 7-18-85 Green called railroad spike. 10-29-89 Greene called same. 7-25-90 excavated railroad spike fd at surface. Railroad spike found 5" down. Stone found 12" down. Harrison set. 7-25-90. Re-tied 10-26-98 by Kiste. Re-tied 10-15-02 by Wilcoxon.  
14050902

REF.	DISTANCE	DESCRIPTION
1.	46.38'	PK nail E PwP#11-741 DA
2.	154.74'	SE corner of house ADDRESS 10506
3.	55.00'	Cut 'x' N-rim manhole
4.	58.80'	PK nail W PwP#2-741 DB 12"up
5.	14.95'	<del>PK</del> nail E PwP#24-741 CB (mag nail w/bw) 4"up
6.	129.39'	<del>PK</del> nail N PwP#23-741 CB (mag nail w/bw) 10"up